

6"x6"x1.61"
SMALL

1200W
POWERFUL

1.2kg
LIGHT



The NEVO+1200S configurable power supply is the smallest in its class, delivering up to 1200W from a 6"x6" x 1.61" package weighing only 1.2kg when fully configured and is the ultimate power solution for demanding industrial applications where size, weight, low standby power and primary side inhibit are vital factors. Each configured unit consists of an input module with up to eight output modules, where any combination of outputs can be fitted to create a power solution with up to sixteen isolated outputs.

Standard features include intelligent fan control, wide output voltage adjust capability and primary side shutdown with standby power consumption of less than 3 Watts. A low noise fan option with virtually silent operation is also available, which allows you to use this innovative power supply in even the quietest of environments. The series carries full IEC/UL60950 safety approvals, complies with EN61000 Immunity, EN55022-B EMC Standards and features market leading specifications and design in application support.

MAIN FEATURES

- Up to 1200 Watts of output power
- Primary side remote on/off function
- Standby power \leq 3 Watts
- 6" x 6" x 1.61" footprint
- Low noise fan option
- UL60950 2nd edition approved
- Industry leading power density (21W/in³)
- Lightest modular design – only 1.2kg – 1000Watts/kg
- Efficiency up to 89%
- Remote current / voltage programming
- Accurate current sharing
- Parallel and series connection of modules
- 2 x 5V 1A bias supply
- Field configurable
- RoHS compliant
- 2 Year warranty

SPECIFICATIONS

INPUT ELECTRICAL						
Parameter	Details	Min	Type	Max	Units	
AC Input Voltage	Nominal range is 100V to 240V	85		264	Vrms	
AC Input Frequency	Contact factory for 400Hz operation.	47	50/ 60	63	Hz	
DC Input Voltage	Standard	120		370	Vdc	
Power Rating	See graphs for deratings			1200	Watts	
Input Current	1200W output at 120Vrms input		12		Amps	
Inrush Current	265Vrms (cold start)			40	Amps	
Fusing	5x20 Fast acting			12.5	Amps	
Input Current Limit			14		Amps	
Efficiency	See graphs		86	89	%	
Idle Power	All outputs fitted and enabled		46		Watts	
Idle Power	All outputs fitted and Disabled		32		Watts	
Standby Power	Latched off state, 120Vrms		2.5		Watts	
Power Factor			0.99	0.99		
Holdup	1200W output at 120Vrms input	17	20	21	mS	
UVLO	Turn on only	78		84	Vrms	
Over temperature	Internally monitored. Latching	115		125	°C	
Reliability	40°C 80% load			2	FPMH	
SIGNALS	Output Bias voltage	Two isolated Bias Outputs available	4.8	5	5.2	V
	Output Bias current	Hiccup type current limit	0		1	A
	Power Good voltage	PNP open collector with internal 10k pull down resistor	8	10	15	V
	Power Good current		0		20	mA
	Inhibit voltage		2		15	V
	Inhibit current	10k ohm input impedance	0.2		1.5	mA
	Global inhibit voltage		3		15	V
	Global inhibit current	5k ohm input impedance	0.6		3	mA
	AC_OK voltage	High output	4.7		5.2	V
		Low output	0		0.1	V
	AC_OK current		-10		10	mA
	AC_OK warning	See user manual for exceptions	5			mS
	Primary Bias voltage	Medically Isolated	4.8	5	5.2	V
	Primary Bias current	Hiccup type current limit			0.5	A
Primary Remote On/Off	Negative Edge Triggered, Refer to User Manual		5		V	

INSTALLATION			
Parameter	Details	Parameter	Details
Equipment class	I	Flammability rating	94V-2
Installation category	II	IP Rating	IP10
Pollution degree	2	ROHS Compliance	2002/95/EC
Material group	IIIb		Indoor use only

RELIABILITY				
Component	Details	Min	Max	Units
FAN	Mag Lev Std (2 Fans per unit)		3.8	FPMH
INPUT	Excluding FAN		2	FPMH
OUTPUT	See individual output datasheets		1	FPMH
Warranty			2	Years

SAFETY				
Parameter	Details	Min	Max	Units
Isolation Voltage	Input to Output		4000	Vac
	Input to Chassis		1500	Vac
	Output to Chassis		250	Vdc
	Output to Output		250	Vdc
Isolation Clearance	Primary to Secondary (Reinforced)	7		mm
	Primary to Chassis (Basic)	2.5		mm
Isolation Creepage	Primary to Secondary (Reinforced)	12		mm
	Primary to Chassis (Basic)	4		mm
Leakage Current	265Vac, 63Hz, 25°C		1500	uA

MECHANICAL	
Parameter	Details
Size	154.5mm (L) x 152.4 mm (W) x 41.0 ± 1.0 mm (H) (see diagram for tolerance details)
Weight	720 gram +60 gram per output module
Mounting	Bottom (see diagram for details)

ENVIRONMENTAL

	Parameter	Details	Min	Max	Units	
Storage	Temperature		-40	+85	°C	
	Humidity	Relative, non-condensing	5	95	%	
	Altitude		-200	5000	m	
	Air Pressure		54	106	kPa	
Operation	Temperature	Full power De-rate input and outputs at 2.5%/°C	-20	50	°C	
	Humidity	Relative, non-condensing	5	95	%	
	Altitude		-200	3000	m	
	Air Pressure		78	106	kPa	
	Noise Level	Unit at idle Unit at full power, 25°C Measured 1m from fan intake		42	61	dB(A)
	Shock	3000 bumps at 10G (16ms) half sine wave				
	Vibration	1.5G 10 to 200Hz sine wave, 20G for 15min in 3 axes random vibration				






EMC

	Parameter	Standard	Level
Emissions	Radiated electric field	EN55011, EN55022, FCC	A (See Note)
	Conducted emissions	EN55011, EN55022, FCC	B
	Harmonic Distortion	EN61000-3-2	Compliant
	Flicker & Fluctuation	EN61000-3-3	Compliant
Immunity	Electrostatic discharge	EN61000-4-2 (15kV air, 8kV contact)	4
	Radiated RFI	EN61000-4-3 (10V/m)	3
	Fast Transient burst	EN61000-4-4 (4kV)	4
	Input line surges	EN61000-4-5 (1kV L-N, 2kV L-E)	3
	Conducted RFI	EN61000-4-6 (10V)	4
	Power Freq. Magnetic Field	EN61000-4-8 (10A/m)	3
	Voltage Dips	EN61000-4-11 (EN55024)	Compliant

Note: To meet Class B radiated emissions the end user should add ferrites to I/P and O/P cables. Consult Vox Power for details.

AGENCY APPROVALS


Standard	Details	File
UL60950-1	UL60950-1 2nd edition, December 19, 2011	UL: E316486
IEC/EN60950-1	IEC 60950-1:2005 (2nd Edition); Am 1:2009	
CSA-C22.2 No. 60950-1A-07	2nd edition	
CE MARK	LVD 2014/35/EU	
CB certificate and report available on request		

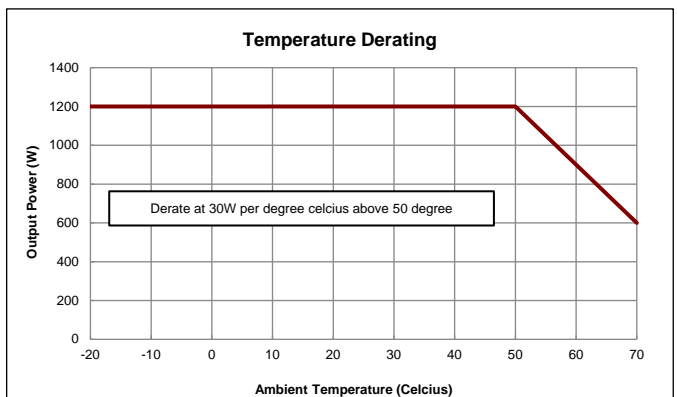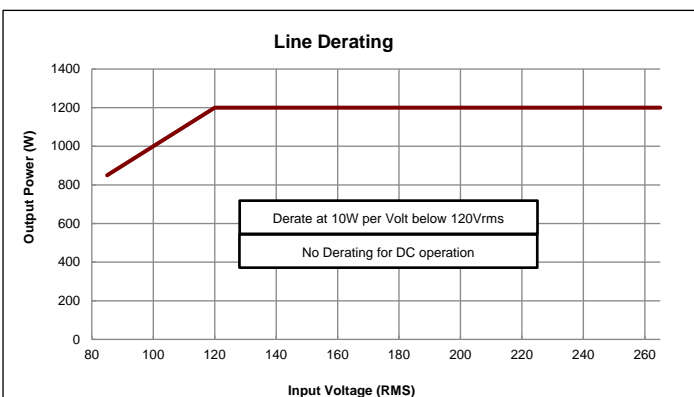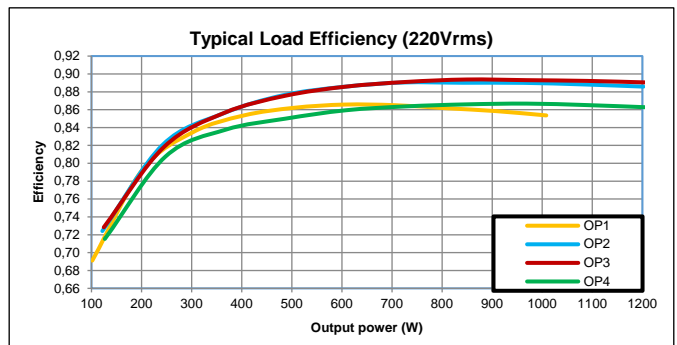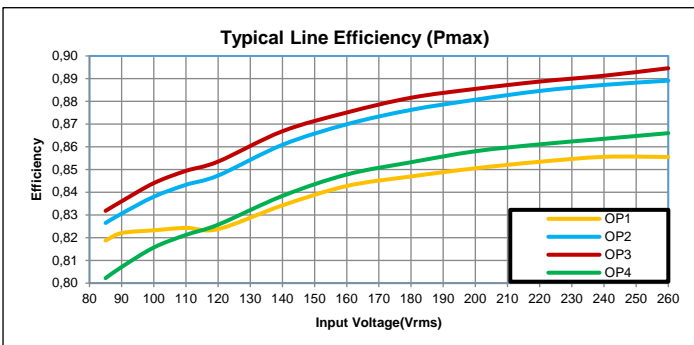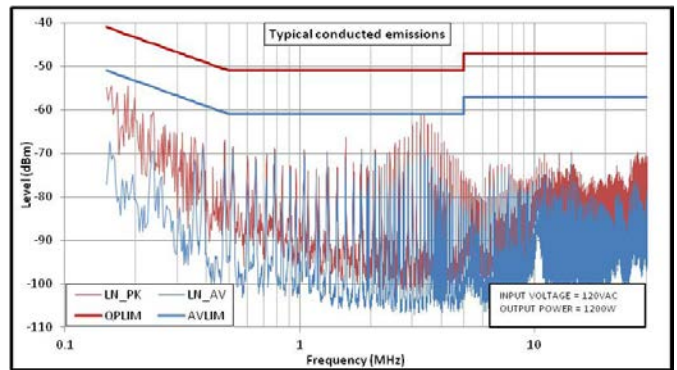

MECHANICAL DIMENSIONS AND MOUNTING SCREWS

SCREWS			
LOCATION	DETAILS	PENETRATION	TIGHTENING
MOUNTING	M4 x 4	4mm max, including chassis	0.55 NM ⁽¹⁾
OUTPUT MODULES	M3 x 5, Countersink Posi, 16 Places	Defined by screw	0.35 NM ⁽¹⁾
CHASSIS LID AND FACEPLATE	M3 x 5, Countersink Posi, 11 Places	Defined by screw	0.35 NM ⁽¹⁾


1. Torque settings are for general reference only. The torque settings shown in the datasheet are the insert manufacturers recommended values.

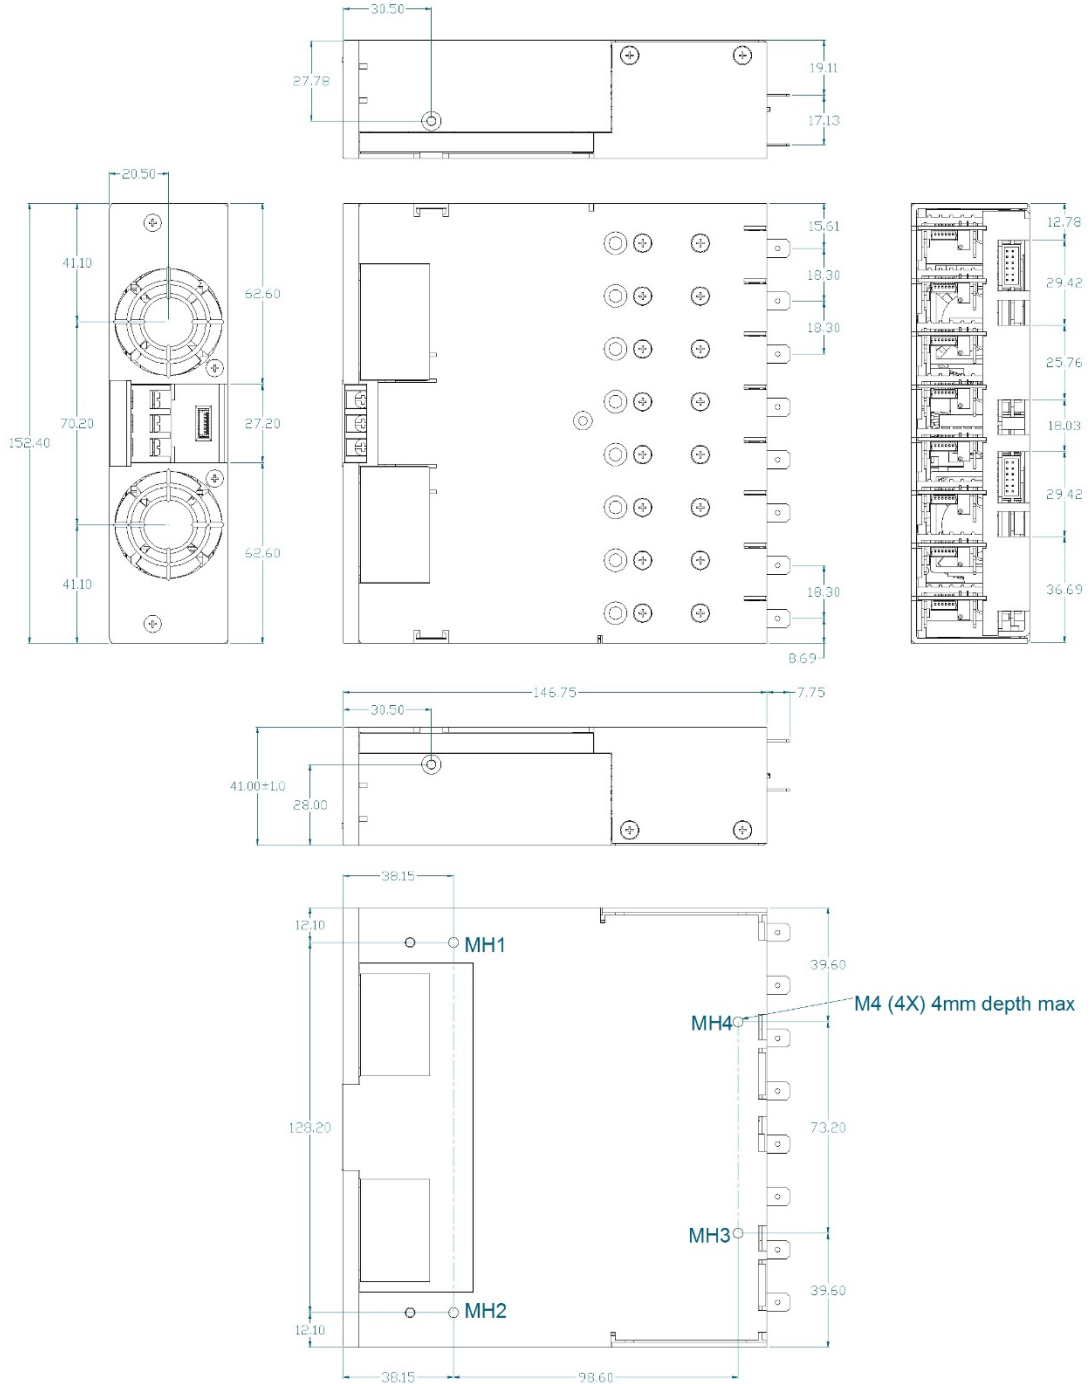

TOLERANCES unless otherwise stated - All dimensions in mm and according to DIN 2768-1/-2 CLASS C

CONNECTORS


PINOUTS		
J1		
Circuit	Details	
1	Live	
2	Earth	
3	Neutral	
J2a/b		
Circuit	Details	
1	Power Good	Slot
2	Inhibit	A and E
3	Power Good	Slot
4	Inhibit	B and F
5	Power Good	Slot
6	Inhibit	C and G
7	Power Good	Slot
8	Inhibit	D and H
9	Global Inhibit	
10	AC OK	
11	+5V 1A Bias Supply	
12	COM	
J6		
1	Common	
2	+5V 500mA Bias	
3	Shut Down	
4	Reserved	
5	Reserved	
6	Reserved	

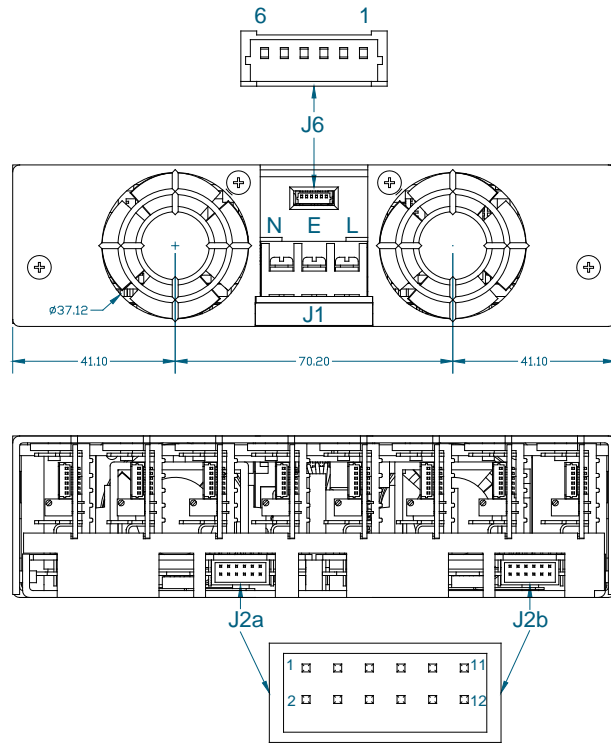

REF	DETAILS	MANUFACTURER	HOUSING	TERMINAL
J1	MAINS INPUT: 3 Pin, Barrier, 6-32 Steel Screws, 0.8 NM or 7IN LB Torque Cable 14-18AWG, 300V, 16A, 105°C, use appropriately rated fork or ring terminal.	MOLEX		
J2a/b	GLOBAL SIGNALS: 12 Pin, 2mm, without Friction Lock, 24-30 AWG	MOLEX	511101251	503948051
J6	INPUT BIAS: OUTPUT SIGNALS: 6 Pin, 1.25mm, with Friction lock, 28-32 AWG	MOLEX	510210600	500588000

- Notes
1. Direct equivalents may be used for any connector parts.
 2. All cables must be rated 105°C min, equivalent to UL1015

PART NUMBERING SYSTEM

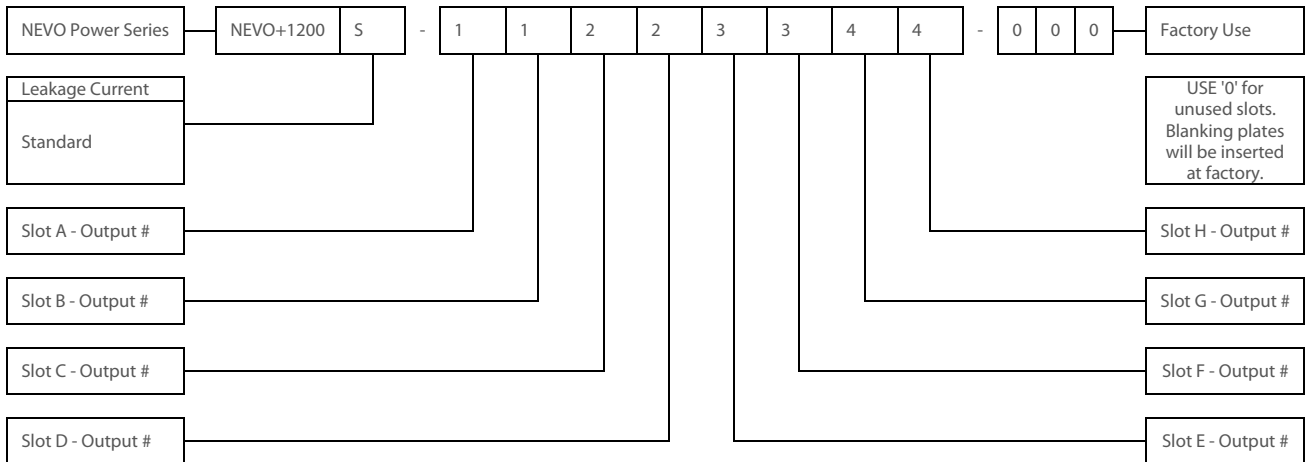

Our design team will assist with value add requirement if an application requires standard/non-standard accessories or non-nominal voltage settings. Once approved, the factory will issue a 3 or 4 digit code for your specific configuration which can be used for all future orders of the same configuration. When ordering an input unit with no outputs inserted, simply order NEVO+1200S

All specifications are believed to be correct at time of publishing. Vox Power Ltd reserves the right to make changes to any of its products and to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Vox Power Ltd does not assume any liability arising out of the use or application of any of its products and of any information to the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any products of Vox Power Ltd. VOX POWER LTD DISCLAIMS ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF SUITABILITY, FITNESS FOR PURPOSE, MERCHANTABILITY AND NON-INFRINGEMENT. Please consult your local distributor or Vox Power directly to ensure that you have the latest revision before using the product and refer to the latest relevant user manual for further information relating to the use of the product. Vox Power Ltd products are not intended for use in connection with life support systems, human implantations, nuclear facilities or systems, aircraft, spacecraft, military or naval missile, ground support or control equipment used for the purpose of guidance navigation or direction of any aircraft, spacecraft or military or naval missile or any other application where product failure could lead to loss of life or catastrophic property damage. The user will hold Vox Power Ltd harmless from any loss, cost or damage resulting from its breach of these provisions.