

KEY FEATURES

- Universal Input Range 90-305VAC, 47-440 Hz
- I/O Isolation 4300VAC
- Operating Ambient Temperature Range -40°C to +85°C
- No Load Power Consumption < 0.1W
- 5000m Altitude Application
- Over-Voltage Category OVC III
- High Efficiency up to 90%
- Isolation Class II
- EMC Compliant without External Components
- Safety Approval to UL / IEC / EN 62368-1
- Design meet IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1
- 3-Year Product Warranty

**ELECTRICAL SPECIFICATIONS**


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	DPATCV40-5S	DPATCV40-12S	DPATCV40-15S	DPATCV40-24S	DPATCV40-48S
Max Output Wattage (W)	35W	40W			
Input	Voltage				
	90-305 VAC or 120-430 VDC				
	Frequency (Hz)				
	47-440 Hz				
	Current (Full load)				
	1000 mA max. (115 VAC) / 500 mA max. (230 VAC)				
Output	Inrush Current (<2ms)				
	60 A max. (115 VAC) / 100 A max. (230 VAC)				
	Leakage Current				
	0.25 mA max. (100-240 VAC)				
	No Load Power Consumption				
	< 0.1W (115/230 VAC)				
Output	Voltage (V.DC.)				
	5V	12V	15V	24V	48V
	Voltage Accuracy				
	±2%				
	Current (mA) max				
	7000	3333	2666	1666	833
	Line Regulation (LL-HL) (typ.)				
	±0.5%				
	Load Regulation (0-100%) (typ.)				
	±1%				
Protection	Minimum Load				
	0%				
	Maximum Capacitive Load				
	8000 uF	6000 uF	5000 uF	1200 uF	820 uF
	Ripple & Noise (Full Load)				
	120mV		150mV	240mV	480mV
	Efficiency (at 230 VAC)				
	87%	90%	90%	89%	89%
Hold-up Time (typ)					
30 ms (at 230VAC)					
Isolation	Over Power Protection				
	Auto recovery				
	Over Voltage Protection				
Zener diode clamp					
Short Circuit Protection					
Hiccup mode (automatic recovery)					
Input-Output (V.AC)					
4300V					
Environment	Operating Temperature				
	-40°C...+85°C (with derating)				
	Storage Temperature				
	-40°C...+85°C				
	Temperature Coefficient				
	±0.05%/°C				
	Altitude During Operation (UL / IEC / EN 62368-1)				
	5000m				
	Humidity				
95% RH					
MTBF					
>300,000 h @ 25°C (MIL-HDBK-217F)					
Over Voltage Category					
III: Compliance to EN 61558; altitude up to 2000 meters.					
Vibration					
IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)					
Shock					
IEC60068-2-27					
Physical	Dimensions (L x W x H)				
	2.52 x 1.8 x 0.93 Inches (64.1 x 45.6 x 23.5 mm) Tolerance ±0.5 mm, Height Tolerance ±1 mm				
	Case Material				
	Plastic resin (flammability to UL 94V-0)				
Weight					
125 g					
Cooling Method					
Free air convection					
Safety	Approval				
	UL / IEC / EN 62368-1				
Meet					
IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1					
EMC	EMI (Conducted & Radiated Emission)				
	EN 55032 class B				
EMS (Noise Immunity)					
EN 55035					

NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.
(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)

MECHANICAL DIMENSIONS (Top View)

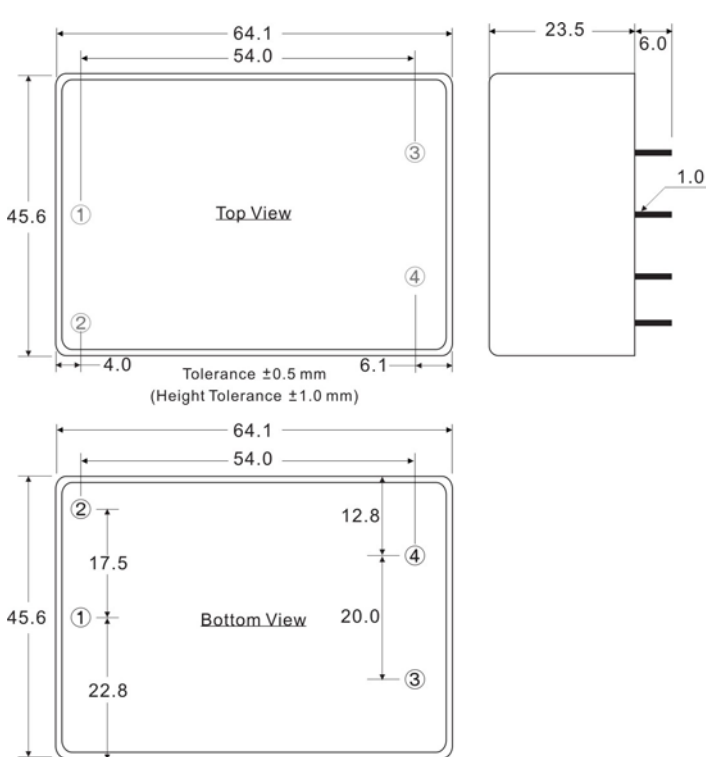

PIN#	Single
1	AC IN (N)
2	AC IN (L)
3	-DC OUT
4	+DC OUT

DERATING

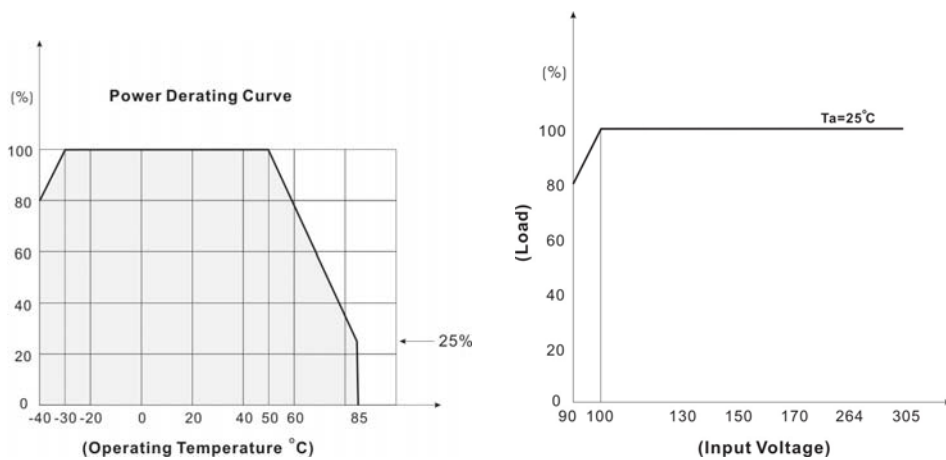

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.

