

ENCLOSED AC-DC POWER SUPPLIES

DPYEF200 SERIES Product Specifications

DPYEF Series are single-output slim type power supply and for wide range AC input from 90VAC to 264VAC.

The series to the high efficiency up to 95%, and operates from -30°C ~ 70°C under air convection without fan.

The series serves as a high performance power supply, solution for various industrial applications.




KEY FEATURES

- Universal AC Input/ Full Range
- Built-in active PFC function
- Protection: Short Circuit/Overload/ Over Voltage/Over Temperature
- Cooling by free air convection
- -30~+70°C working temperature

Model Information

Part Number	DC Voltage	Rated Current	Rated Power	VOLTAGE ADJ.RANGE	Max.Capacitive Load
DPYEF200-5□	5V	40A	200W	4.5~5.5V	10000uF
DPYEF200-12□	12V	16.7A	200.4W	11.4~12.6V	8000uF
DPYEF200-15□	15V	13.4A	201W	14.3~15.8V	7000uF
DPYEF200-24□	24V	8.4A	201.6W	22.8~25.2V	5000uF
DPYEF200-36□	36V	5.6A	201.6W	34.2~37.8V	3000uF
DPYEF200-48□	48V	4.2A	201.6W	45.6~50.4V	2000uF

Model Encoding

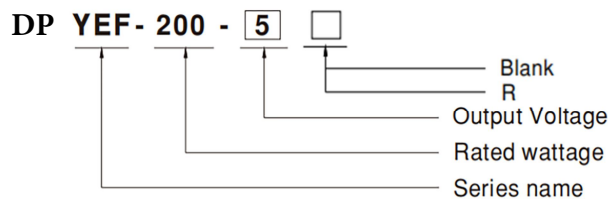

Type	Description
Blank	Enclosed
R	Built-in DC ok active signal and redundant function .

For quotes and customization requests, please contact us at (877) 634-0982 or sales@digipwr.com



Learn more: www.digipwr.com

Input

VOLTAGE RANGE	90~264VAC 127~370VDC
FREQUENCY RANGE	47~63Hz
POWER FACTOR (Typ.)	PF \geq 0.94/230VAC, PF \geq 0.98/115VAC at full load
AVERAGE EFFICIENCY(Typ.)	91.0% DPYEF200-5
	93.0% DPYEF200-12
	94.0% DPYEF200-15
	94.0% DPYEF200-24
	94.0% DPYEF200-36
	94.0% DPYEF200-48
AC CURRENT(Typ.)	2.2A/115VAC 1.1A/230VAC
INRUSH CURRENT(Typ.)	Cold Start 40A/115VAC Cold Start 80A/230VAC
LEAKAGE CURRENT	<0.75mA/240VAC

Output

RIPPLE & NOISE(max.)	200mVp-p	DPYEF200-5
	240mVp-p	DPYEF200-12
	240mVp-p	DPYEF200-15
	240mVp-p	DPYEF200-24
	240mVp-p	DPYEF200-36
	300mVp-p	DPYEF200-48
VOLTAGE TOLERANCE	\pm 2.0%	DPYEF200-5
	\pm 1.0%	DPYEF200-12
	\pm 1.0%	DPYEF200-15
	\pm 1.0%	DPYEF200-24
	\pm 1.0%	DPYEF200-36
	\pm 1.0%	DPYEF200-48
LINE REGULATION	\pm 0.5%	
LOAD REGULATION	\pm 1.0%	DPYEF200-5
	\pm 0.5%	DPYEF200-12
	\pm 0.5%	DPYEF200-15
	\pm 0.5%	DPYEF200-24
	\pm 0.5%	DPYEF200-36
	\pm 0.5%	DPYEF200-48
SETUP,RISE TIME	2000ms, 80ms/230VAC at full load	
	3000ms, 80ms/115VAC at full load	
HOLD UP TIME (Typ.)	10ms/230VAC at full load	
	10ms/115VAC at full load	

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.



Protection

SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER LOAD	110%-140% Rated Output Power Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	5V:5.75~6.75V 12V:13.2~15.6V 15V:16.5V~19.5V 24V:26.4~31.2V 36V:39.6~46.8V 48V:52.8~62.4V Protection type :Shut down O/P voltage,re-power on to recover
OVER TEMPERATURE	Protection type :Shut down O/P voltage, recovers automatically after temperature goes down

FUNCTION

DC OK SIGNAL(Optional)	Contact rating(max.):15Vdc/10mA resistive load
REDUNDANT(Optional)	For parallel connection protection:For parallel applications, when one PSU can not work, the another one will be automatically enabled. This can prevent the system crash, and provide the reliability of system.

Environment

WORKING TEMP.	-30 °C to +70 °C (Refer to "Derating Curve")
Working Humidity	20 ~ 95% RH Non-Condensing
STORAGE TEMP, HUMIDITY	-40°C ~+85°C,10 ~ 95% RH non-condensing
TEMP. COEFFICIENT	± 0.03%/°C(0~50°C)
VIBRATION	10~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y,Z axes
MTBF	2472.1K hrs min. Telcordia SR-332 (Bellcore);
OVER VOLTAGE CATEGORY	III;According to EN62368-1,altitude up to 2000 meters
SAFETY PROTECTION	CLASS I

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.



SAFETY & EMC

SAFETY STANDARDS	BS EN/EN62368-1, BS EN/EN60335-1,EN/EN61558-1,BS EN/EN61558-2-16
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.25KVAC
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/ 500VDC/25 °C/70% RH
EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3,
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11,BS EN/EN55035

Note

- 1.All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance :includes set up tolerance, line regulation and load regulation.
4. Derating may be needed under low input voltages. Please check the derating curve for more details.
5. The ambient temperature derating of 3.5°C/1000m is needed for operating altitude greater than 2000m(6500ft)
- 6.The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
7. R type efficiency slightly less than the Blank type, according to the actual measurement.
8. Inrush current parameter has 10% tolerance.

Length:	194mm/7.63in
Width:	55mm/2.16in
Height:	26mm/1.02in
Weight:	500g

Packing



Carton Size:	31 × 28.5 x 23.5 CM
	12.2 x 11.22 x9.25 in
Master Carton Quantities:	20pcs/Carton

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.



Dimensions and Installation

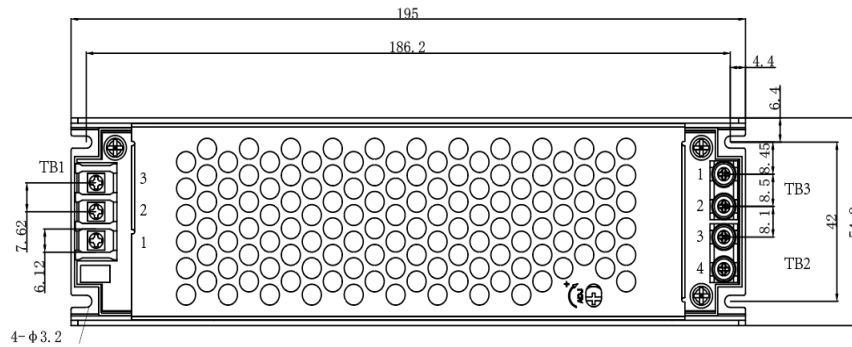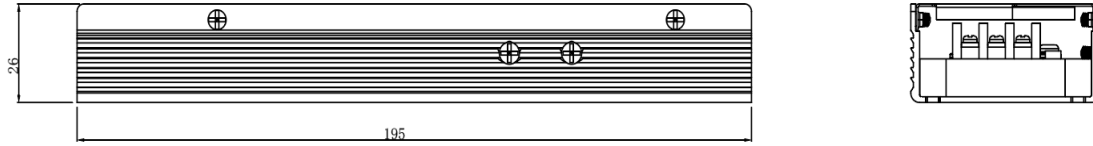


AC Input Terminal(TB1) pin NO. Assianment

Pin No.	Assignment
1	AC/L
2	AC/N
3	⊕

DC Output Terminal(TB2, TB3) pin NO. Assianment

Pin No.	Assignment
1,2	-V
3,4	+V




Block Diagram

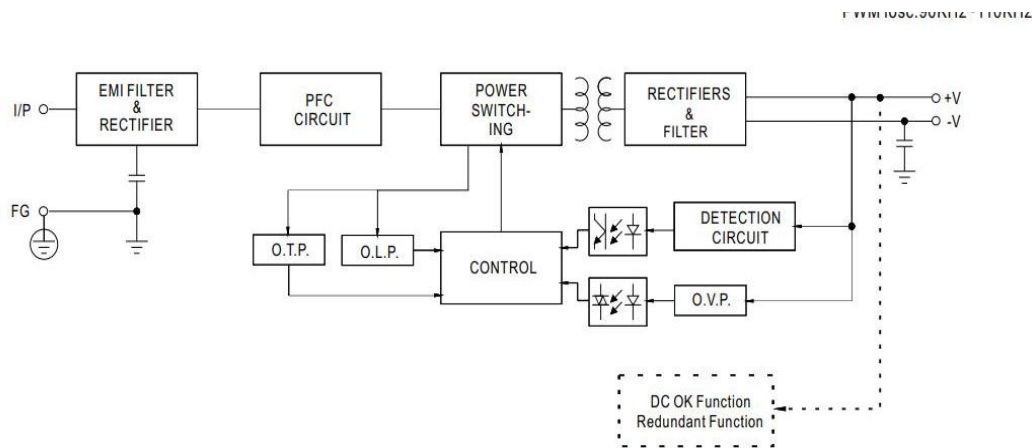


About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.

Deduction curve and temperature

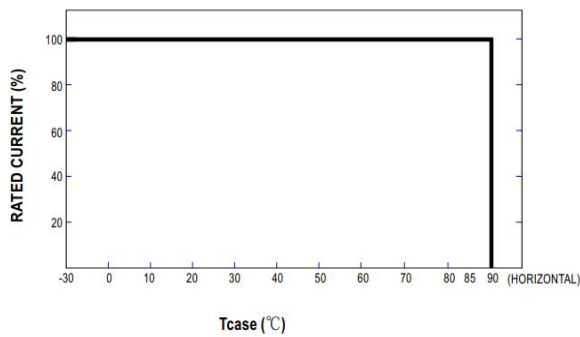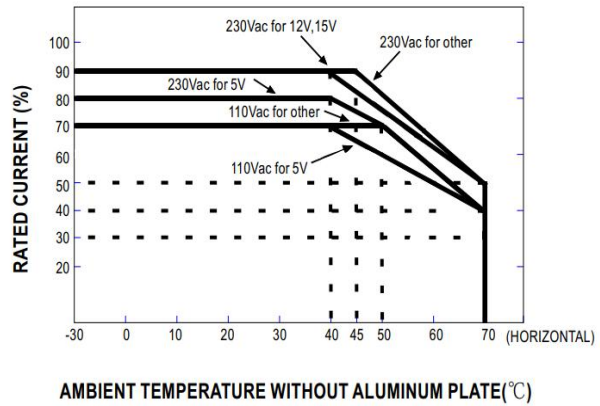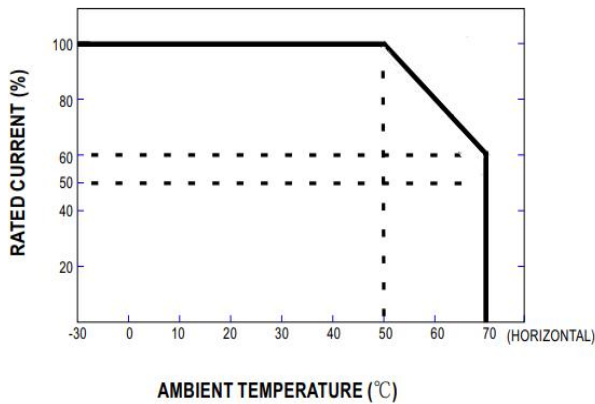

Minus output and input voltage curves

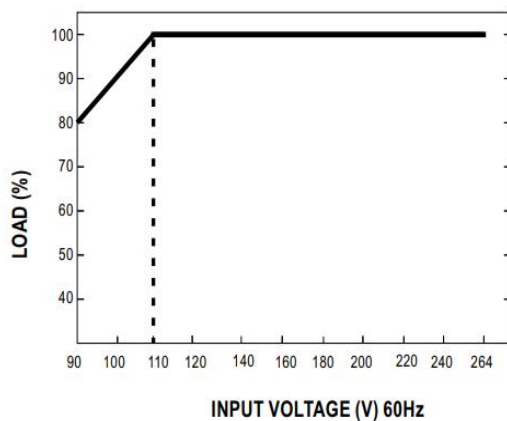

About Digital Power


Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.

DC OK Relay Contact

Optocoupler C-E Pin Conduction	PSU turns on	DC ok
Optocoupler C-E Pin Open	PSU turns off	DC fail
Optocoupler Rating(max.)	15Vdc/10mA resistive load	

Redundant function

- (1)DPYEF Series is built-in redundant function and can be connected 2 units in parallel .
- (2) When in parallel operation the maximum load should not be greater than the rated power of any PSU.

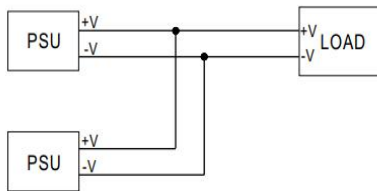


Installation Diagram

1. Operate with additional aluminum plate

In order to meet the "Derating Curve" and the "Static Characteristics", YEF series must be installed onto an aluminum plate (or the cabinet of the same size) on the bottom. The size of the suggested aluminum plate is shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and YEF series must be firmly mounted at the center of the aluminum plate.

2. It is suggested to install the product with M3 combination screws, and the product must be firmly installed at the center of the aluminum plate.

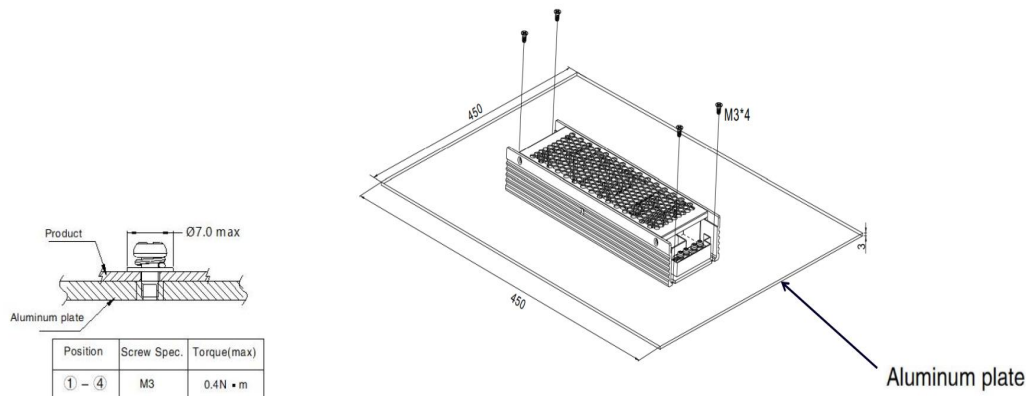

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.