

**KEY FEATURES**

- Compact 2.0" x 3.0" x 1.0" Size
- 3 Year Warranty
- Universal 85-264V Input
- Single Output
- 90% Peak Efficiency
- 87% Average Efficiency
- <300mW No Load Input Power
- IEC 60601-1 3<sup>rd</sup> ed. Medical Cert.
- IEC 62368-1 2<sup>nd</sup> ed. Certification
- IEC 60601-1-2 4<sup>th</sup> ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover



CHASSIS/COVER



OPEN FRAME

**SAFETY SPECIFICATIONS**



Underwriters Laboratories  
File E137708/E140259

UL 62368-1:2014, 2<sup>nd</sup> Edition  
CAN/CSA-C22.2 No. 62368-1-14, 2<sup>nd</sup> Edition  
AAMI/ANSI ES60601-1:2005/(R) 2012/(R)2021  
CAN/CSA-C22.2 No. 60601-1:2014:2022



CB Reports/Certificates (including all National and Group Deviations)

IEC 62368-1:2014, 2<sup>nd</sup> Edition  
IEC 60601-1:2005/A1:2012/A2:2020



TUV SUD America

EN 62368-1:2014, 2<sup>nd</sup> Edition  
EN 60601-1:2006/A1:2013/A2:2021



Low Voltage Directive (2014/35/EU of February 2014)  
RoHS Directive (Recast) (2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101  
Restriction of the Use of Certain Hazardous Substances in EEE Regulations 2012 SI No. 3032 + 2019 SI No.492

**MODEL LISTING**

MODEL	OUTPUT	P <sub>out</sub>
DPGRN60-1001	3.3V/9.0A	30W
DPGRN60-1002	5.0V/9.0A	45W
DPGRN60-1003	12V/5.0A	60W
DPGRN60-1004	15V/4.0A	60W
DPGRN60-1005	24V/2.5A	60W
DPGRN60-1006	28V/2.2A	60W
DPGRN60-1007	48V/1.3A	60W
DPGRN60-1008	19V/3.1A	60W

**GENERAL SPECIFICATIONS**

Means of Protection	
Primary to Secondary	2MOPP (Means of Patient Protection)
Primary to Ground	1MOPP (Means of Patient Protection)
Secondary to Ground	Operational Insulation(Consult factory for 1MOPP)
Dielectric Strength <sup>(7, 8)</sup>	
Reinforced Insulation	5656 VDC, Primary to Secondary
Basic Insulation	2121 VDC, Primary to Ground
Operational Insulation	707 VDC, Secondary to Ground
Leakage Current	
Earth Leakage	<300µA NC, <1000µA SFC
Touch Current	<100µA NC, <500µA SFC
Switching Frequency	65 KHz
Remote Sense <sup>(9)</sup>	400 mV compensation of output cable losses
Mean-Time Between Failures	>250,000 hours, MIL-HDBK-217F, 25° C, GB
Weight	0.24 lbs. Open frame/0.34 lbs. Chassis and cover

**OUTPUT SPECIFICATIONS**

Output Power at 50°C <sub>(1)</sub> (See Derating Chart)	60W	85-264 V <sub>in</sub>
Voltage Centering	±0.5%	(Output at 50% load)
Voltage Adjust Range	95-105%	
Load Regulation	±0.5%	(0-100% load change)
Source Regulation	0.5%	
Ripple & Noise	1.0%	<150mV (1001,1002)
Turn-On Overshoot	None	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µs maximum, 5% maximum deviation (maximum deviation on 1001: 8%, 1002: 6%).	
Overvoltage Protection	Latching, between 110% and 150% of rated output voltage (optional).	
Overpower Protection	110-160% rated P <sub>out</sub> min., cycle on/off, auto recovery	
Hold-Up Time	10ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	27ms typical	
Minimum Load	No minimum load required	

**INPUT SPECIFICATIONS**

Protection Class	I	
Source Voltage	85 – 264 VAC (see derating chart)	
Frequency Range	47 – 63 Hz	
Input Protection <sup>(5)</sup>	Internal 2A time-delay fuse	
Peak Inrush Current	50A max. at 230 V	
Peak Efficiency	90%	
Average Efficiency	87% (1003-1008), 85% (1002), 80% (1001)	
Light Load Efficiency	85%, 115/230 V <sub>in</sub> , 33% power, 81% (1001), 84% (1002)	
No Load Input Power	<0.3W, 115/230 V <sub>in</sub> , no load	


**ENVIRONMENTAL SPECIFICATIONS**

Cooling	Free air convection	
Ambient Operating	0° to + 70°C	
Temperature Range	Derating: see power rating chart	
Ambient Storage Temp. Range	- 40° to + 85°C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	3,000m ASL	Operating
	12,192m ASL	Non-Operating
Temperature Coefficient	0.02%/°C	
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.	
Shock	20G, 11ms, 3 axis, 3 each direction.	

**EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4<sup>TH</sup> ed./IEC 61000-6-2:2005)**


Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% U <sub>T</sub> , 0.5 cycles, 0-315°	100/240V A/A
		0% U <sub>T</sub> , 1 cycles, 0°	100/240V A/A
		40% U <sub>T</sub> , 10/12 cycles, 0°	100/240V B/A
		70% U <sub>T</sub> , 25/30 cycles, 0°	100/240V B/A
Voltage Interruptions	EN 61000-4-11	0% U <sub>T</sub> , 300 cycles, 0°	100/240V B/B
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	

All specifications are maximum at 25°C/60W unless otherwise stated, may vary by model and are subject to change without notice.

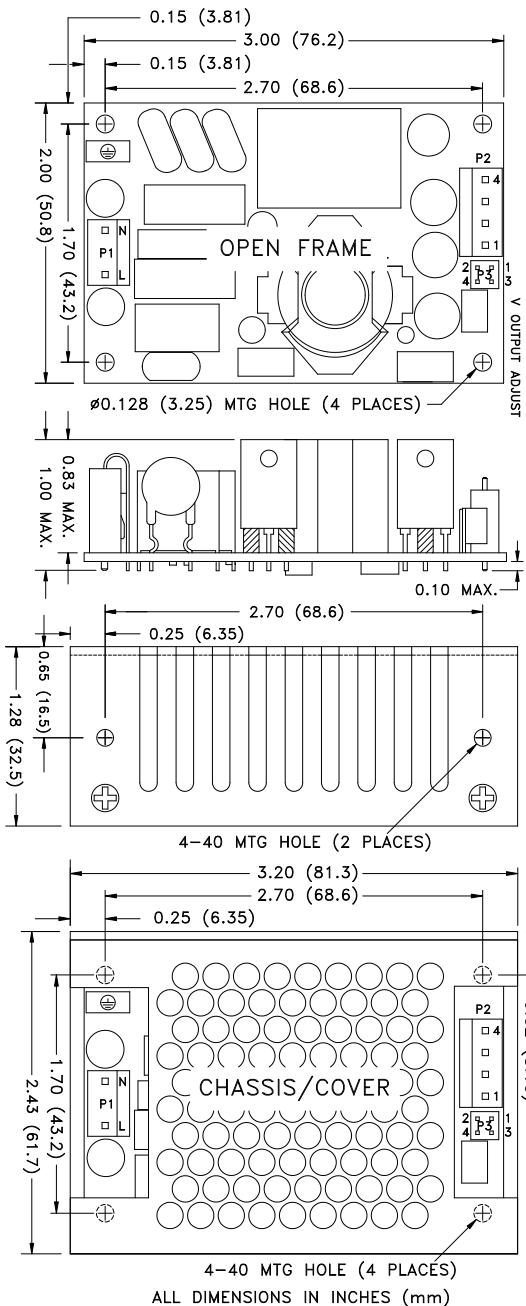

1. Continuous Output Power must not exceed 60W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Standard models include only one UL-listed fuse in the line conductor of the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in the neutral conductor of the end product, and may need to have high breaking capacity as determined by the end product application. Models with the DF suffix include a fuse in the line and neutral leads. With high breaking capacity fuses, maximum product height specification may be exceeded in open frame configuration.
6. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
7. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1<sup>ST</sup> Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
8. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
9. Remote-Sense terminals may be used to compensate for cable losses up to 400mV, depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
10. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.


**TYPICAL EFFICIENCY vs. LOAD**

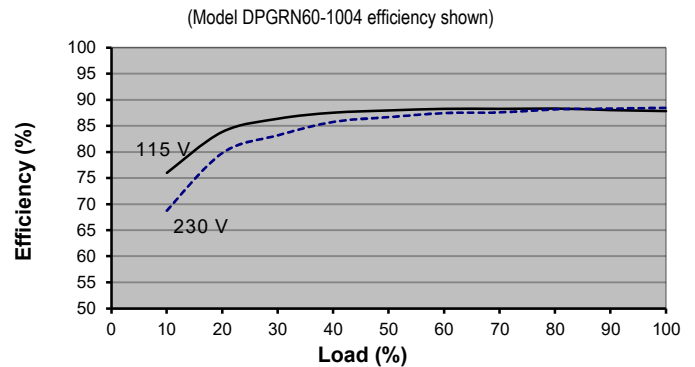

**CONNECTOR SPECIFICATIONS**

<p><b>P1</b></p> <p>NEUTRAL LINE</p>	<p>AC Input</p> <p>0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.</p>
<p><b>P2</b></p> <p>4 (-) OUTPUT 3 (-) OUTPUT 2 (+) OUTPUT 1 (+) OUTPUT</p>	<p>DC Output</p> <p>0.156 friction lock header mates with Tyco 770849-4 or equivalent crimp terminal housing with Tyco 3-640707-1 equivalent crimp terminal.</p>
<p><b>P3</b></p> <p>(+) SENSE 2    1 (+) OUTPUT (-) SENSE 4    3 (-) OUTPUT</p>	<p>DC Sense</p> <p>0.100 breakaway header mates with Molex 22-55-2041 or equivalent crimp terminal housing with Molex 71851 or equivalent crimp terminal.</p>
	<p>Ground</p> <p>0.187 quick disconnect terminal</p>

**MAX P<sub>OUT</sub> vs. AMBIENT TEMPERATURE/INPUT VOLTAGE**

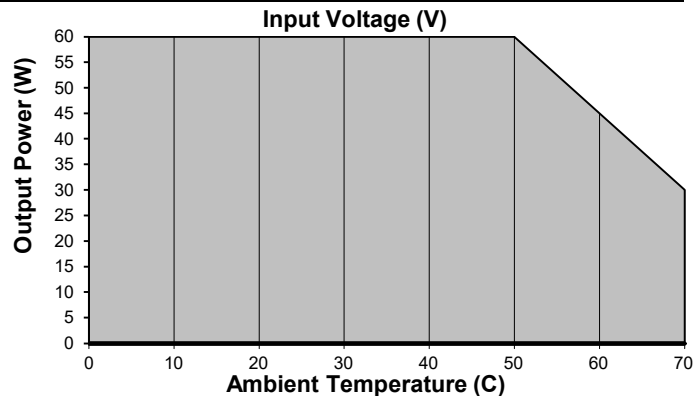

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.

**About Digital Power**

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.

