

KEY FEATURES

- Compact 5.0" x 8.0" x 1.6" Size
- 3 Year Warranty
- Universal 85-264V Input
- 2-4 Regulated & Adjustable Outputs
- 90% Peak/87% Average Efficiency
- <300mW No Load Input Power
- -20 to +70°C Operating Temperature
- RoHS Compliant
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- 5V/2A Standby Output
- 12V/0.6A Fan Output
- Remote Inhibit/Enable
- Optional Chassis, Fan Enclosure



CHASSIS/COVER



CHASSIS

SAFETY SPECIFICATIONS



Underwriters Laboratories
File E137708/E140259

UL 62368-1:2014, 2nd Edition
CAN/CSA-C22.2 No. 62368-1-14
AAMI/ANSI ES60601-1:2005(R) 2012
CAN/CSA-C22.2 No. 60601-1:2014



CB Reports/Certificates (including all National and Group Deviations)

IEC 62368-1:2014, 2nd Edition
IEC 60601-1:2005/A1:2012



TUV SUD America

EN 62368-1:2014, 2nd Edition
EN 60601-1:2006/A1:2013



Low Voltage Directive
RoHS Directive (Recast)

(2014/35/EU of February 2014)
(2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101
Restriction of the Use of Certain Hazardous Substances in EEE Regulations
2012 SI No. 3032 + 2019 SI No.492

MODEL LISTING

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
DPNXT700-4001	+5V/30A	+24-28V/10A	+12-15V/10A	-12-15V/10A
DPNXT700-4002	+24V/20A	+12-15V/15A	+3.3-5V/10A	-12-15V/10A
DPNXT700-4003	+24V/20A	+24-28V/10A	+12-15V/10A	-12-15V/10A
DPNXT700-4004	+48V/10A	+3.3-5V/20A	+12-15V/10A	-12-15V/10A
DPNXT700-4005	+48V/10A	-24-28V/10A	+12-15V/10A	-12-15V/10A
DPNXT700-3001	+12V/30A	+12-15V/20A	-	-3.3-5V/10A
DPNXT700-3002	+24V/20A	+12-15V/15A	-	-12-15V/10A
DPNXT700-2001	+5V/30A	+12-15V/20A	-	-
DPNXT700-2002	+12V/30A	+12-15V/20A	-	-
DPNXT700-2003	+24V/20A	-3.3-5V/20A	-	-
DPNXT700-2004	+24V/20A	-12-15V/20A	-	-

EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4TH ed./IEC 61000-6-2:2005)

Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% U _r , 0.5 cycles, 0-315°	100/240V A/A
		0% U _r , 1 cycles, 0°	100/240V A/A
		40% U _r , 10/12 cycles, 0°	100/240V B/A
		70% U _r , 25/30 cycles, 0°	100/240V B/A
Voltage Interruptions	EN 61000-4-11	0% U _r , 300 cycles, 0°	100/240V B/B
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	

OUTPUT SPECIFICATIONS

Output Power at 50°C ₍₁₎ (See Derating Chart)	300W 700W 700W	Convection Cooled, Chassis Internal Fan Enclosure 300LFM Forced-Air Cooled, Chassis
Voltage Centering	Outputs 1-4:	±0.5% (All outputs at 50% load)
Voltage Adjust Range	Output 1:	95-105% Outputs 2-4: 90-110% ₍₁₅₎
Load Regulation	Output 1:	±0.5% (10-100% load change)
	Outputs 2-4:	±1.0% (0-100% load change)
Source Regulation	Outputs 1-4:	0.5%
Cross Regulation	Outputs 2-4:	0.5%
Ripple & Noise	Outputs 1-4	1.0% or 100mV p-p, 20MHz BW
Current Limit	Each Output	110-150% Fold-back, Auto-Recovery
Turn On Overshoot	None	
Transient Response	Output recovers to within 1% of initial set point due to a 50-100-50% step load change, 1ms maximum, 4% maximum deviation.	
Overvoltage Protection	Output 1, 110%-150% of rated output voltage, latching.	
Overpower Protection	110%-150% rated P _{out} , cycle off/on, auto recovery.	
Hold-Up Time	>20ms, full power.	
Start-Up Time	<1 sec., 115/230V input.	
Output Rise Time	Output 1: 5ms typical. Outputs 2-4: 30ms typical.	
Minimum Load ₍₅₎	No minimum load required.	
Remote Sense ₍₉₎	Output 1: 250mV compensation of output cable losses.	
Enable/Inhibit (System) ₍₁₆₎	Contact closure enables all outputs.	
Enable/Inhibit (Outputs 2, 3, 4) ₍₁₇₎	Contact closure inhibits individual output.	
Standby Output	5V/2A	

INPUT SPECIFICATIONS

Protection Class	I	
Source Voltage	85 – 264 VAC (see derating chart)	
Frequency Range	47 – 63 Hz	
Input Protection	Dual internal 12A time-delay fuses, 1500A breaking capacity	
Peak Inrush Current	40A max	
Peak Efficiency	Up to 89%	
Average Efficiency	Up to 86% (Avg. of 25%, 50%, 75% and 100% rated load)	
No Load Input Power	<500mW	


ENVIRONMENTAL SPECIFICATIONS

Ambient Operating Temp. Range	-20°C to + 70°C, Derating: (see derating chart)	
Ambient Storage Temp. Range	- 40°C to + 85°C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	3,000m ASL Operating/ 12,192m ASL Non-operating	
Temperature Coefficient	0.02%/°C	
Vibration (MIL-STD-810G)	2.5G swept sine, 10-2000Hz, 1 octave/min, 3 axis, 1 hour each	
Shock (MIL-STD-810G)	20g, 11 ms, 3 axis.	


GENERAL SPECIFICATIONS

Means of Protection	2MOPP (Means of Patient Protection)	
Primary to Secondary	1MOPP (Means of Patient Protection)	
Primary to Ground	Operational Insulation	
Secondary to Ground		
Dielectric Strength _(7, 8)		
Reinforced Insulation	5656VDC (4000VAC)	
Basic Insulation	2121VDC (1500VAC)	
Operational Insulation	707VDC (500VAC)	
Leakage Current		
Earth Leakage	<300µA NC, <1000µA SFC	
Touch Current	<100µA NC, <500µA SFC	
AC Power Fail Signal	Logic low 10-15ms prior to V1 loss of regulation.	
Switching Frequency	PWM:133 KHz/PFC:Variable	
Mean-Time Between Failures	150,000 hours, MIL-HDBK-217F, 25°C, GB	
Weight	1.7 lb. Open frame / 2.2 lb. Chassis and cover	

DPNXT700 MECHANICAL SPECIFICATIONS

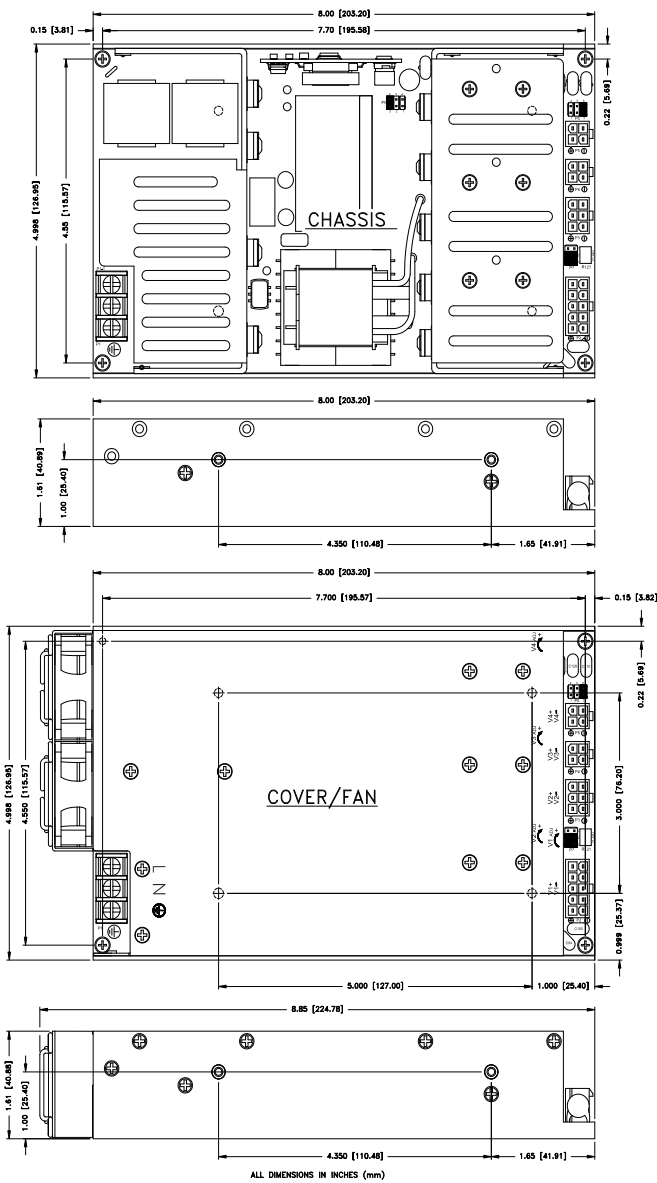


MAX P_{OUT} vs. INPUT VOLTAGE/AMBIENT TEMPERATURE

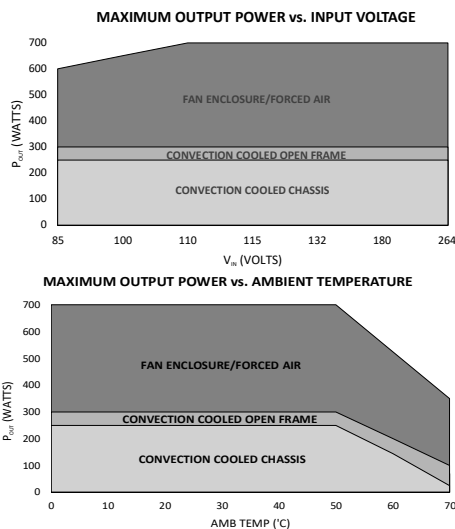

- Derate total output power 4 watts/volt below 110 volt input.
- Derate total output power linearly from 100% at 50°C to 50% at 70°C.
- Derate outputs 2, 3 and 4 25% when convection cooled.

CONNECTOR SPECIFICATIONS

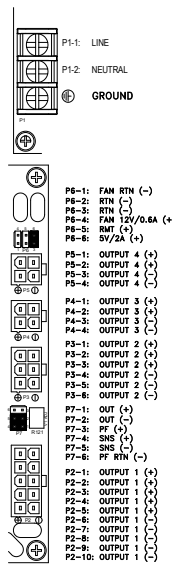

P1: 0.325 #6-32 3-position terminal block.


P5 & P4: 5566 Mini-Fit, Jr. header 39-28-8040 mates with 5557 Mini-Fit, Jr. 39-01-2040 or equivalent crimp housing with 5556 Mini-Fit or equivalent crimp terminal.

P3: 5566 Mini-Fit, Jr. header 39-28-8060 mates with 5557 Mini-Fit, Jr. 39-01-2060 or equivalent crimp housing with 5556 Mini-Fit or equivalent crimp terminal.

P6 & P7: 0.100 breakaway header mates with Molex 22-55-2061 or equivalent crimp housing with Molex 70450 or equivalent crimp terminal.

P2: 5566 Mini-Fit, Jr. header 39-28-8100 mates with 5557 Mini-Fit, Jr. 39-01-2100 or equivalent crimp housing with 5556 Mini-Fit or equivalent crimp terminal.

OUTPUT VOLTAGE ADJUSTMENT LOCATIONS

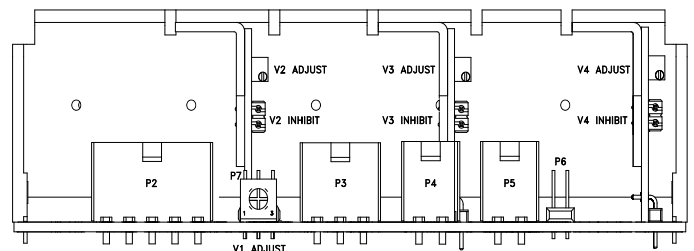

APPLICATIONS INFORMATION

1. Each output can deliver its rated current but total output power must not exceed 700W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Minimum load is not required for reliable operation; however, a 5% load may be required on Output 1 when loading Outputs 2, 3 or 4 to full rated current.
6. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz.
7. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to ensure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
8. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factorythe factory before performing an AC dielectric strength test.
9. Remote-Sense terminals may be used to compensate for cable losses up to 250mV, depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
10. Maximum screw penetration into bottom chassis mounting holes is 0.125 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
13. Power Fail (AC-Good) feature provides a logic-low warning signal from an open collector transistor output 10-15ms prior to loss of output from AC failure, 5V/10mA.
14. 300LFM minimum of airflow must be maintained one inch above all points of top-side components or cover when forced-air cooling is required.
15. Outputs 2, 3 and 4 are adjustable from -10% of lowest voltage rating to +10% of highest voltage rating.
16. RE/SB enables all outputs with a P6-3 to P6-1 switch closure, 6V Max./50mA.
17. Output 2, 3 and 4 Inhibit feature shuts down only that output with a P6-1 to P6-2 switch closure, 45V Max.

About Digital Power

Digital Power Corporation designs and manufactures full custom, value-added, and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.



Learn more:
www.digipwr.com